


# Technical Specification

**Product Code:** VPBN553BK

**Description:** 13A Ingot Fused Connection Unit With Neon & Optional Flex Outlet

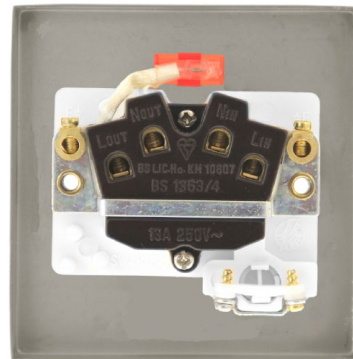

### General Information

<b>Plate Dimensions (mm)</b>	88 (W) x 88 (H) x 8 (D)	
<b>Dimensions With Gasket (mm)</b>	91 (W) x 91 (H) x 9 (D)	
<b>Plate Fixing Centres - Horizontal (mm)</b>	60.3	
<b>Style</b>	Victorian	
<b>Finish</b>	Black Nickel	
<b>Insert Colour</b>	Black	
<b>Gasket Colour</b>	Black	
<b>Materials</b>	Front Plate: Stainless Steel Fuse Drawer Cover: Stainless Steel Terminals: Brass Internal Busbars: Formed Pressed Brass Gasket: Nylon	Insert & Housing: Urea Neon Lens: Polycarbonate Terminal Screws: Steel & Yellow Passivated Earth Strap: Mild Steel
<b>Anti Microbial Certified</b>	No	
<b>Rated Voltage (V~) (Ue)</b>	250	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Fuse Fitted Rating &amp; Type</b>	13A (BS 1362)	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	Ø5	<b>Terminal Torque Value (Nm)</b> 2
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Switched</b>	No	
<b>Twin Earth Terminals</b>	Yes	
<b>Neon Indicator</b>	Yes	<b>Indicator Colour</b> Red
<b>Product Marking</b>	Fused	
<b>Flex Outlet Available</b>	Yes	
<b>Flex Outlet Location</b>	Front of Plate	<b>Flex Outlet Dimension (mm)</b> Ø10
<b>Minimum Back Box Depth (mm)</b>	25	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	10	

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.