

# PRODUCT DATASHEET

## SF CIRCULAR 250 13 W 4000 K IP44 WT

**SURFACE CIRCULAR 250 | Wall and ceiling luminaire with IP44**



---

### AREAS OF APPLICATION

- Corridors
- Stairways
- Bathrooms
- Foyers

---

### PRODUCT BENEFITS

- High luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- Clear cover protects the reflector against dust and contact
- 3 years guarantee

---

### PRODUCT FEATURES

- Beam angle: 120°
- Type of protection: IP44
- Impact resistance: IK03
- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C



## TECHNICAL DATA

### Electrical data

Nominal wattage	13.00 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Power factor $\lambda$	$\geq 0.5$
Mains frequency	50/60 Hz
Inrush current	10.0 A
Total harmonic distortion	< 120 %
Inrush current time $T_{h50}$	150 $\mu$ s

### Luminaire control gear data

Output current	78 mA
Flicker-free	Yes
Max. no. of lum. on circuit break. B16 A	41
Max. no. of lum. on circuit break. C10 A	33
Max. no. of lum. on circuit break. C16 A	53


### Photometrical data

Color temperature	4000 K
Luminous flux	960 lm
Luminous efficacy	75 lm/W
Standard deviation of color matching	<5 sdc <sub>m</sub>
Light color (designation)	Cool White
Color rendering index Ra	>80

### Light technical data

Beam angle	120 °
------------	-------

## Dimensions &amp; weight

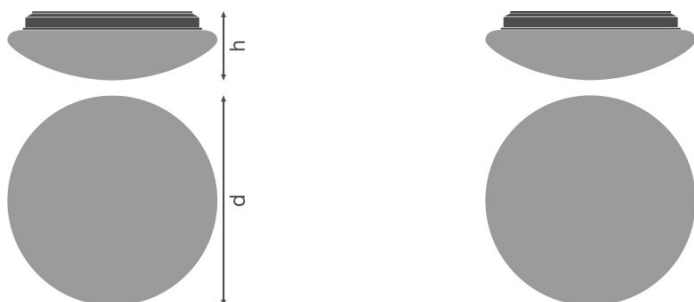

<b>Diameter</b>	250.0 mm
<b>Height</b>	91.0 mm
<b>Product weight</b>	292.00 g

## Colors &amp; materials

<b>Body material</b>	Steel
<b>Housing color</b>	White
<b>Product color</b>	White
<b>Cover material</b>	Polymethylmethacrylate (PMMA)

## Temperatures &amp; operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
----------------------------------	--------------

## Lifespan

<b>Lifespan L70/B50 at 25 °C</b>	30000 h
<b>Lifespan L80/B10 at 25 °C</b>	30000 h
<b>Lifespan L90/B10 at 25 °C</b>	15000 h

## Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Ceiling / Wall

## Capabilities



<b>Dimmable</b>	No
<b>Type of connection</b>	Screw terminal, 3-Pole
<b>LED module replaceable</b>	Not replaceable

## Certificates &amp; standards

<b>Protection class IK (shock resistance)</b>	IK03
---	------

<b>Glow Wire Test according to IEC 695-2-1</b>	650 °C
<b>Photobiological safety group EN62778</b>	RG 0
<b>Protection class</b>	I
<b>Type of protection</b>	IP44
<b>Standards</b>	CE/CB/TÜV SÜD/EAC/RoHS

Light Distribution

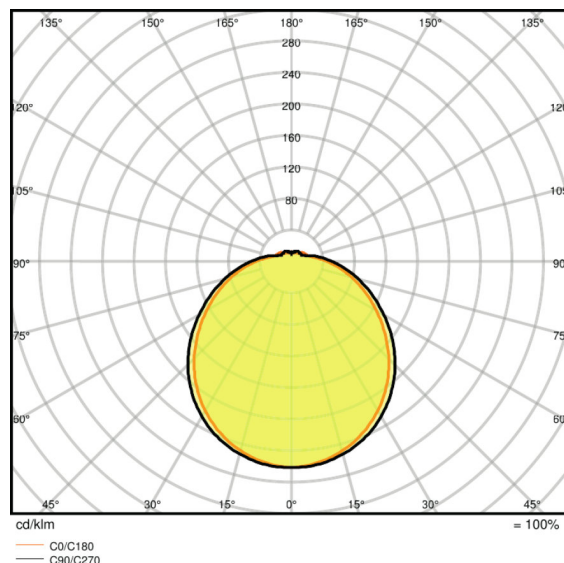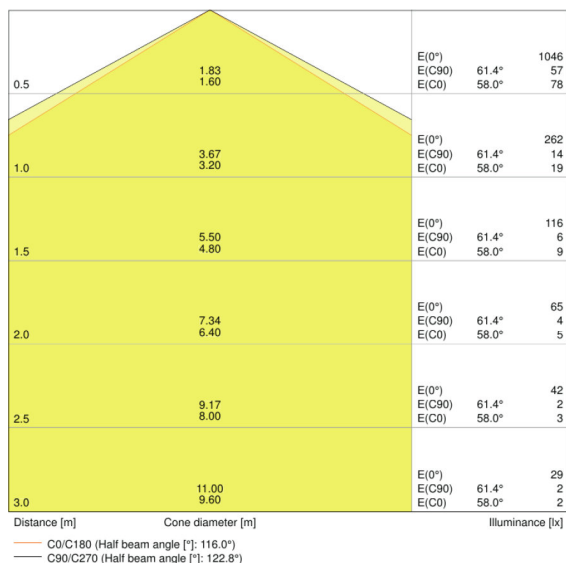

LDC typ cone

LDC typ polar

EQUIPMENT / ACCESSORIES

- Replacement cover optional available

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075110144	Folding carton box 1	280 mm x 282 mm x 98 mm	370.00 g	7.74 dm <sup>3</sup>
4058075110151	Shipping carton box 5	522 mm x 302 mm x 314 mm	2475.00 g	49.50 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

REFERENCES / LINKS

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.