



Classic filament LEDbulbs

CLA LEDBulb DT 7-60W B22 CRI90 A60 FR

Featuring a classic heritage design, Classic filament LED bulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

Product data

General Information	
Cap base	B22 [B22]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	15000 h
Switching cycle	20,000X
Technical type	7-60W
Light Technical	
Colour Code	927-922 [CCT of 2,700 K-2,200 K]
Beam Angle (Nom)	270 °
Luminous flux (nom.)	806 lm
Colour designation	Warm Glow (WG)
Correlated Colour Temperature (Nom)	2700 2200 K
Luminous efficacy (rated) (nom.)	115.00 lm/W
Colour consistency	<6
Colour rendering index (nom.)	90
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Input frequency	50 to 60 Hz


Power (Rated) (Nom)	7 W
Lamp current (nom.)	40 mA
Wattage equivalent	60 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	50 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Lamp Finish	Frosted
Approval and Application	
Energy efficiency label (EEL)	A++

Classic filament LEDbulbs

Energy consumption kWh/1,000 hours	7 kWh
Product Data	
Full product code	871869977126300
Order product name	CLA LEDBulb DT 7-60W B22 CR190 A60 FR
EAN/UPC – product	8718699771263
Order code	77126300

SAP numerator – quantity per pack	1
SAP numerator – packs per outer box	10
SAP material	929002392702
Net Weight (Piece)	0.030 kg


Dimensional drawing




A60 230V 9-60W 806lm 2700-2200K B22 D FR

Product	D	C
CLA LEDBulb DT 7-60W B22 CR190 A60 FR	60 mm	104 mm


Photometric data

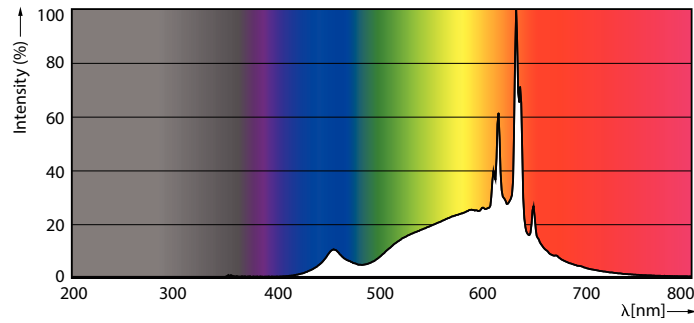

LEDbulb CLA 7W A60 E27 927 922 FR



LEDbulb CLA WGD CR190



Page 11

LEDbulb CLA 7W A60 B22 927 922 FR

Classic filament LEDbulbs

Lifetime



15K LED

15K LMP

