


Technical Specification

Product Code: VPSC416GY

Description: 10AX Ingot 6 Gang 2 Way Plate Switch

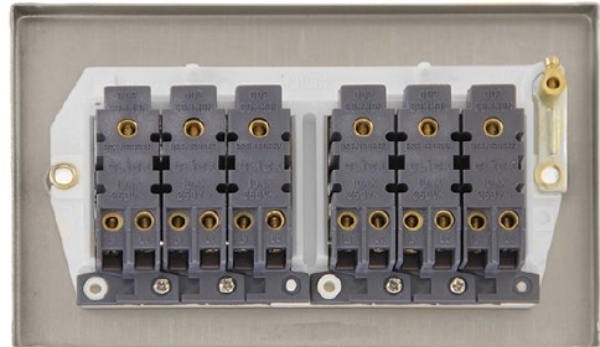

General Information

Plate Dimensions (mm)	146 (W) x 88 (H) x 8 (D)	
Dimensions With Gasket (mm)	149 (W) x 91 (H) x 9 (D)	
Plate Fixing Centres - Horizontal (mm)	120.6	
MiniGrid Plate (Gang)	2	
MiniGrid Single Width Module Quantity	2 x 3	
MiniGrid Double Width Module Quantity	2	
Style	Victorian	
Finish	Satin Chrome	
Insert Colour	Grey	
Gasket Colour	Grey	
Materials	Front Plate: Stainless Steel Switch Cover: Stainless Steel Terminals: Brass Contacts: Silver "on-lay" Copper / Brass Earth Strap: Mild Steel	Insert: Urea Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Gasket: Nylon
Anti Microbial Certified	No	
Rated Voltage (V~) (Ue)	250	Frequency (Hz) 50
Inductive Load Rating (AX)	10	
Load Rating Comments	Suitable for Inductive Loads	
Termination Type	Screw	
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm) 0.5
Terminal Capacity - Solid (mm²)	4 x 1.5 or 2 x 2.5	
Modular Rocker Switches	Yes	
2 Way Switch	Yes	
Minimum Back Box Depth (mm)	25	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Interchangeable with modules in the MiniGrid Range.